



---

# DUAL HALO PROJECTOR HEADLIGHTS

(1999-2004 MUSTANG ALL)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) RH Head Light
- (1) LH Head Light
- (2) High Beam Bulbs
- (2) Low Beam Bulbs
- (2) Quick Splice Connectors

### TOOLS REQUIRED

---


- Pliers
- Wire Stripper

**STEP 1**



Remove the two factory headlight retaining clips.

**STEP 2**

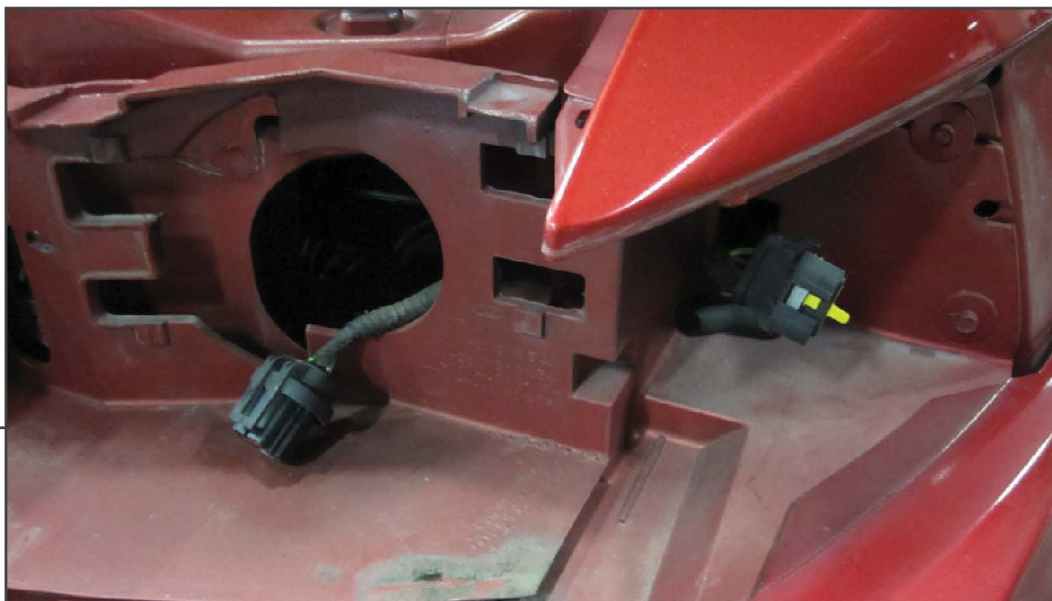


Remove the headlight from the vehicle by unplugging the main headlight and parking light harnesses.

**STEP 3**



Peel back the electrical tape on the factory parking light harness to expose the wires; black, brown, and green w/white stripe.

**STEP 4**

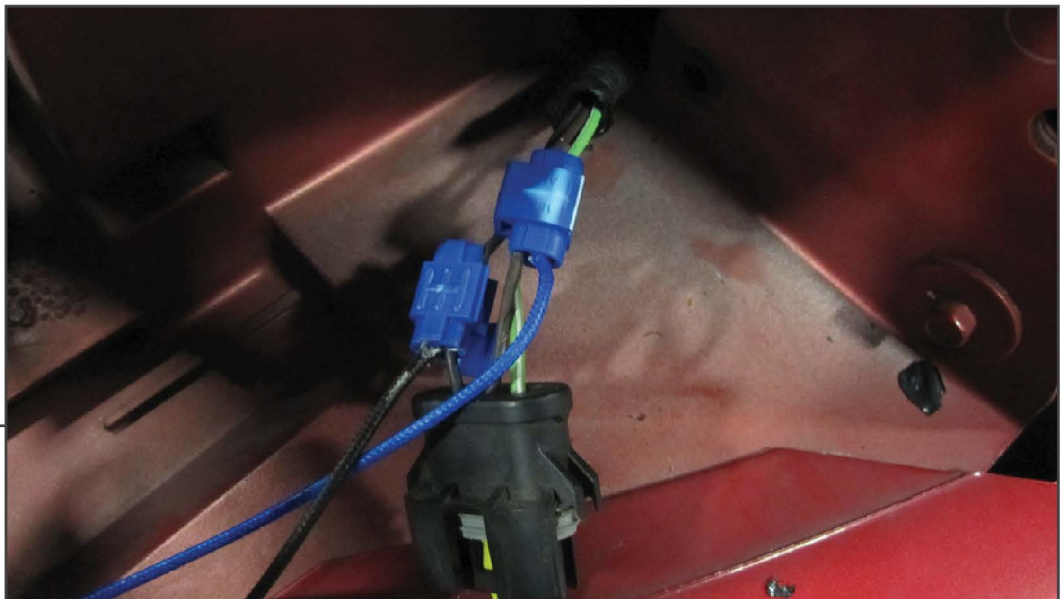

Using the supplied scotch lock connectors, splice the black wire from the new headlight to the black wire from the parking bulb harness, then the blue wire from the new headlight to the brown wire from the parking bulb harness as shown. You may have to strip more insulation from the blue and black wires from the headlight to get a good connection.



**STEP 5**



Remove the parking bulb from your old headlight and place it in the new headlight. Install the new headlight onto the vehicle, making sure to connect both the headlight and parking light harnesses.

**STEP 6**



Once the new headlight is aligned in the bumper, re-install the retaining clips you removed in Step 1 to complete the installation.

**PARKING  
LIGHTS**



Make sure the lights work as follows.


**LOW BEAMS**



**HIGH BEAMS**



**Adjustment**

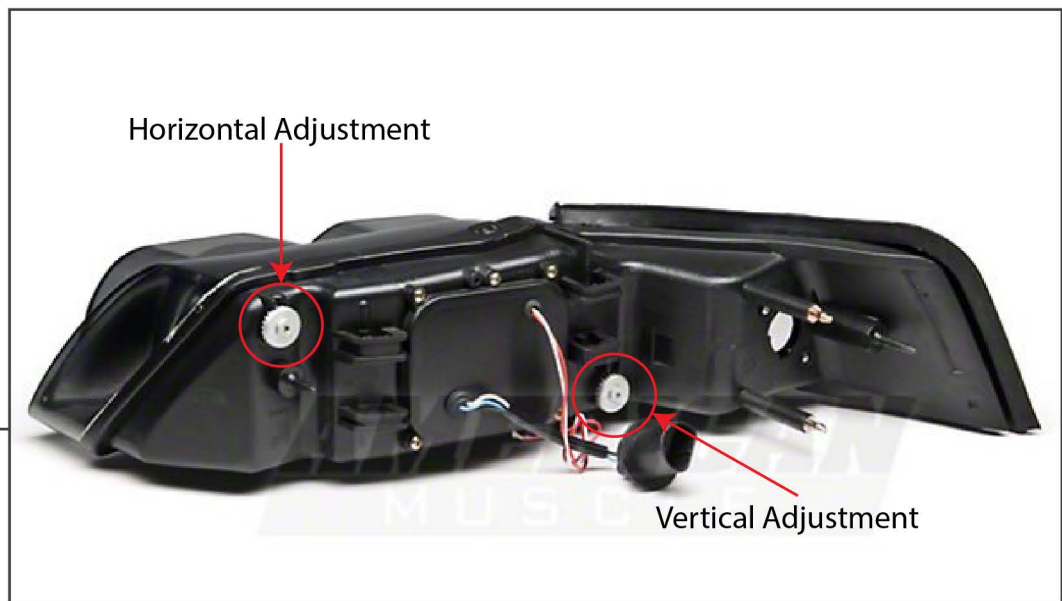

Horizontal adjustment will move the light up or down. Vertical adjustment will move the light left or right. Follow the manufacturers specification for adjustment.