


TOOLS YOU NEED

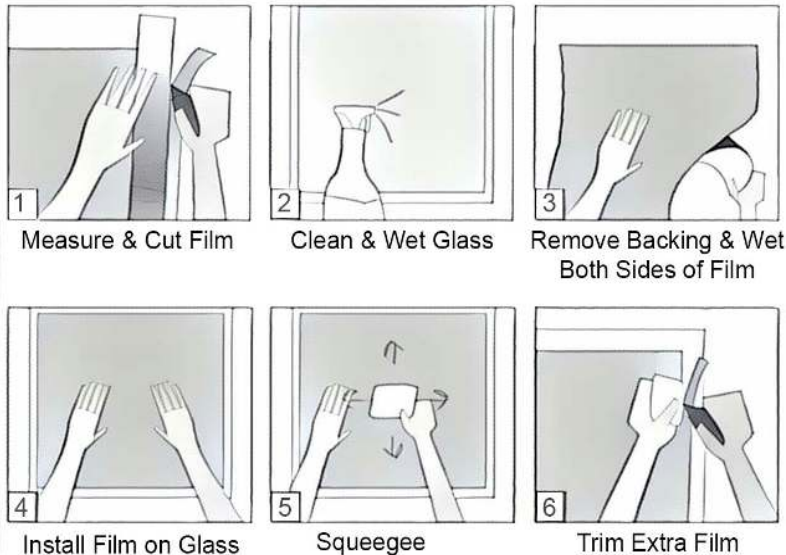

- A spray bottle with liquid soap & a spray bottle with water (to make the liquid soap solution put about 6-8 drops of very mild detergent or baby shampoo in a 32 oz. spray bottle filled with water)

- A plastic card squeegee : As a substitute you may use a plastic paint scraper or an old credit card

- A few paper towels (cotton cloth preferred)

- A sharp retractable knife : Someone who can give extra hands would be very helpful.

1. MEASURE AND CUT FILM

It is a good idea to start with small windows first especially if you are not experienced much. Measure the width and height of the glass surface and determine where you'd like the film keeping about a 1/2" margin of film around the window frame. At this point, the cut film should be bigger than the edges of your frame.

2. CLEAN THE WINDOW

It is very important to clean the area to which the film will be applied. Make sure that it is free from grease, dirt, lint and grime to ensure the film's adhesiveness.

3. WET THE WINDOW

With the spray bottle and liquid soap solution spray & fully wet window until beads of soapy water run down the glass. If the window becomes dry, re-wet it completely before applying film. Don't try to apply in the direct hot sun as your solution will dry up pretty fast.

4. REMOVE THE LINER FROM THE FILM

Window film has 2 parts - the film and the clear liner. Peel away corner of the liner first by attaching two pieces of tape firmly to the front and back side of film's corner. Pull them apart to separate the little portion of liner and the film. Then wet/spray another part of window's surface or a different window's surface, have the liner side of film facing you, and cling the peeled corners of film on the newly wet surface. This will hold the film while you remove the rest of liner (or it is better to have someone hold the film while removing the liner). As you carefully peel the liner away, generously spray the liquid solution on the exposed adhesive sticky side of the film. Gently take the corners of film off the window.

5. APPLY THE WET FILM ON THE WET WINDOW

When liner is removed from the film, both window and film should be fully wet with soapy water. Place the adhesive side of the film gently on the glass. Handle the film carefully by holding corners to avoid wrinkles or finger prints. Once the film is applied on the window, move around the film for the right placement. If the film is stuck and not moving, you need to peel off the film a little and add more water spray on the window.

6. SQUEEGEE THE FILM

Now using the plastic squeegee move from the center out towards the edges to remove soapy water and air bubbles. Spraying water on the film's surface will make squeegeeing process easier. Cover the squeegee blade with paper towel to prevent any scratches during this process. Although all Buy window films have Scratch Resistance Coating, sharp plastic squeegee may leave scratch marks. You can remove large bubbles with the squeegee. Small bubbles smaller than 1/8" will disappear in a few days.

7. TRIM THE EDGES

By pressing the edge of the film to the window frame with your squeegee as a guide, trim the film with knife around the four edges.

8. CLEAN AND CURING

Clean the film with soapy water. It may take a few days to dry and completely stick to the glass.