



## Rometec s.r.l.

Via Alessandro Minuziano, 87-89 , 00128 Roma

Tel. 065061635 – Fax 065061542

Sito web: [www.rometec.it](http://www.rometec.it) – email: [info@rometec.it](mailto:info@rometec.it)

P. IVA 04120621000 - CCIAA RM 736916

Reg. Soc. Tribunale RM 9229/91 - Cap. soc. 46'482,00 €



CERTIFICATO 1237 \*  
Certificate

# ELETTROVALVOLA SANITARIA

Sanitary quick install solenoid valve, sanitary clamp solenoid valve that is used in the pharmaceutical, food and other industries, valve fittings used for high grade health requirements in the workplace, the body material is 304 stainless steel or 316L stainless steel, sanitary stainless steel solenoid valve sealing material mainly made of silicon rubber with PTFE, commonly used in pharmaceutical factory or repair and related equipment and pipeline configuration.



**COVNA**<sup>®</sup>  
FLUID CONTROL SPECIALIST



Sanitary grade fast loaded stainless steel solenoid valve

**Type:** Normally Closed / Normally Open

**Medium Temperature:** 0~80°C / 0~150°C

**Medium:** Water , Air , Alcohol , Soft drink , Oil , Hot water , Steam , Gas

**Connection:** Clamps

**Orifice(mm):** 15-100

**Bore:** 1/2" - 4"

**Working Pressure:** 0 - 1.0Mpa

**Voltage:** 220Vac, 24Vdc

**Power:** 25W

**Body Material:** Stainless Steel 304 , 316 , 316L


**Seal Material:** NBR , EPDM , FKM , PSI

**Ambient temperature:** max 60°C

**Degree of protection:** IP65

**Explosion Levels:** Ex dIIBT4 , Ex dIICT5

**Installation Tips:** Priority to coil upright

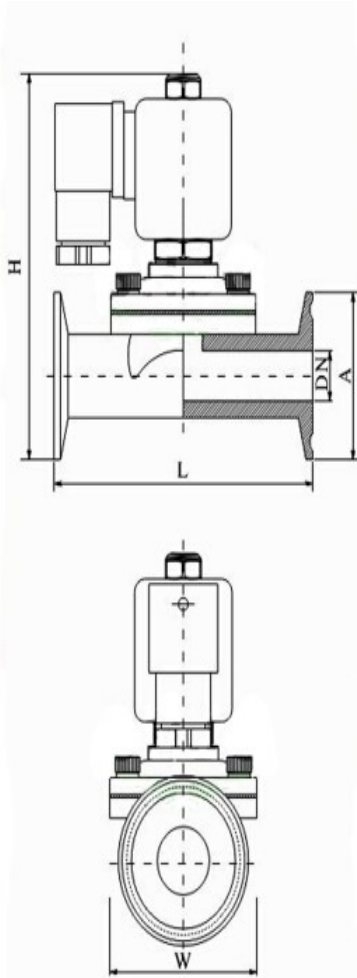

DN	Size				
	G	L	H	W	A
19	3/4	101	128	60	25
25	1	140	138	75	50.5
32	1-1/4	158	155	100	50.5
38	1-1/2	160	175	105	64
45	1-3/4	160	175	105	64
51	2	200	180	130	64
54	2	200	180	130	64
57	2-1/4				
63	2-1/2				
70	2-3/4				
76	3				
89	3-1/2				
102	4				