ウェアラブルセンサーを用いたバイタルデータ分析プラットフォームの 検討

山登 庸次†

† NTT ソフトウェアイノベーションセンタ 東京都武蔵野市緑町 3-9-11 E-mail: †yamato.yoji@lab.ntt.co.jp

あらまし 本稿では、バイタルデータを活用しリアルタイムなアクションに繋げるための、ウェアラブルセンサーデー タを用いた分析プラットフォームを提案する.近年 IoT 技術が進展しているが、ヘルスケア分野では、分析したバイ タルデータを元に、リアルタイムなアクションを行うアプリケーションは十分検討されていない.その原因としては、 ストリーム処理/マイクロバッチ処理の適切な使い分け、ネットワークコストの検討が不十分であるからと考える.既 存の課題を解決するため、私達はバイタルデータ分析プラットフォームを提案する.提案は、ウェアラブルバイタル センサーを一つの例に用いて、着用者の心電や加速度のバイタルデータを取得して、スマートホン及びクラウドで姿 勢、疲労度、緊張度等の分析を行い、危険な姿勢や疲労度推移等を取得可能とする.プラットフォームを実装し、ト ライアルの準備を行っている.

キーワード IoT, ウェアラブルセンサー, クラウド, Spark Streaming, リアルタイム処理,

Study of Vital Data Analysis Platform Using Wearable Sensor

Yoji YAMATO[†]

† Software Innovation Center, NTT Corporation 3-9-11, Midori-cho, Musashino-shi, Tokyo 1808585 Japan E-mail: †yamato.yoji@lab.ntt.co.jp

Abstract In this paper, we propose a vital data analysis platform which resolves existing problems to utilize vital data for real-time actions. Recently, IoT technologies have been progressed but in the healthcare area, real-time actions based on analyzed vital data are not considered sufficiently yet. The causes are proper use of analyzing methods of stream / micro batch processing and network cost. To resolve existing problems, we propose our vital data analysis platform. Our platform collects vital data of Electrocardiograph and acceleration using an example of wearable vital sensor and analyzes them to extract posture, fatigue and relaxation in smart phones or cloud. Our platform can show analyzed dangerous posture or fatigue level change. We implemented the platform and we are now preparing a field test.

Key words IoT, Wearable Sensor, Cloud Computing, Spark Streaming, Real-Time Processing,

1. Introduction

Recently, IoT (Internet of Things) technologies have been progressed. IoT is the technology to attach communication functions to physical things, connect things to networks, analyze things data to enable automatic control. IoT application areas are wide such as manufacturing, supply chain [1] [2], maintenance which Industrie4.0 [3] and Industrial Internet [4] target and also health care, agriculture, energy. To utilize IoT data, IoT platforms also appeared to develop and operate IoT applications effectively. AWS IoT [5] is a platform to analyze IoT data on a cloud by integrating several Amazon Web Services. For example, Amazon Kinesis collects and delivers IoT data by MQTT(MQ Telemetry Transport) [6] protocol to a cloud and Amazon Machine Learning analyzes those data by machine learning algorithms. To integrate IoT data and other services, there are some service coordination technologies such as [7]-[13]. In manufacturing or maintenance area, there are applications of appropriate timing maintenance actions based on monitored business machine statuses (e.g., KOMTRAX [14]), but in the healthcare area, real-time actions based on analyzed vital data are not considered sufficiently yet. Of course, there are applications to show daily statistical information such as calorie consumption using wearable sensor data such as amount of movement acquired by list band sensor, however it has not been able to utilize vital data to real-time actions.

There are two main causes. The first is proper use of analyzing methods. To utilize vital data in real-time, not only batch processing but also stream processing for continuous data and micro batch processing for bulk data of short period are needed, but it is not considered to apply health care industry sufficiently. The second is network cost. Because vital data is continuously generated, bandwidth to transfer them to a cloud is large.

Based on these backgrounds, in this paper, we propose a vital data analysis platform which resolves existing two problems based on open source HortonWorks Data Platform (HDP) [15] architecture to utilize vital data. Our platform collects workers' vital data of Electrocardiograph and acceleration using wearable vital sensor (e.g., [16]) and analyzes them to extract posture, fatigue and relaxation in smart phones or cloud. Our platform can show analyzed dangerous posture or fatigue level change.

The rest of this paper is organized as follows. In Section 2, we review existing IoT technologies. In Section 3, we propose and design a vital data utilization platform which resolves existing problems. We summarize the paper in Section 4.

2. Overview of IoT data technologies

Because IoT technologies include a lot of topics such as sensor, actuator, big data, platform, communication protocol and so on, this section only introduces existing platform technologies and wearable sensor for IoT vital data analyzing applications.

To utilize IoT data collected by sensing technologies, AWS IoT [5] is a major platform. Amazon IoT can integrate each service of Amazon Web Services for IoT processing flow. Amazon Kinesis [17] can deliver IoT data to Amazon cloud by MQTT [6] protocol. To analyze IoT big data delivered by Amazon Kinesis, Amazon Machine Learning provides machine learning functions such as regression or classification.

NTT DOCOMO and GE release an IoT solution which provides GE's industrial wireless router Orbit (MDS-Orbit platform) with NTT DOCOMO's communication module in 2015 [18]. Companies can collect operation statuses of facilities such as bridge, electric and gas by setting Orbit. Moreover, companies can develop IoT applications on Toami [19] which is an IoT cloud platform provided by NTT DOCOMO and enables visualization of collected data easily.

IoT use cases not only analyzing and visualizing IoT data but also taking appropriate actions fast such as automatic repair orders are increased. Therefore, IoT data analysis of stream processing such as Storm [20] or Spark Streaming [21] becomes more popular though batch processing such as MapReduce [22] was major conventionally. Stream processing of IoT data enables fast actions based on real time situation change. HDP [15] is a data processing platform with all Open Source Software stack. HDP provides data analysis modules of batch and stream processing based on HDFS [23] and YARN. Users can analyze data by MapReduce, Spark Streaming or so on, and can store data to HBase, Hive or so on.

Regarding to sensors for acquiring vital data, wearable terminals have been spread. There are various terminals such as watch type, list band type, eyeglass type, T-shirt type and so on. Apple Watch [24] is a watch type computer, contains heartbeat sensor, acceleration sensor and can collect vital data continuously. Sony SmartEyeglass [25] is a eyeglass type computer and can collect acceleration and luminance data. Hitoe [16] is a T-shirt type wearable sensor NTT and Toray develop and can collect Electrocardiograph(ECG) and 3-axis acceleration data by wearing hitoe shirt.

In this way, platforms and sensors have been progressed for vital data analysis. However, when we consider to utilize vital data and take real-time business actions such as substitute member assigns, existing technologies have some problems.

In AWS IoT, to analyze IoT data, users need to collect all data to a cloud and need network cost for many sensors in multiple regions. For example, a satellite communication is used to collect business vehicle's sensing data [14] and network cost is huge. When users analyze collected data, Amazon Machine Learning or Amazon Lambda or other services on a cloud are used, however how to use each service for huge continuous vital data is not considered sufficiently.

[18]'s IoT applications developed on Toami are mainly visualize applications of collected data by batch processing. Therefore, applications which take real-time actions such as repair parts orders based on analyzed data are not considered.

Though there are technologies for micro batch or stream processing such as Spark Streaming and Storm, current typical applications are sequential data analysis of SNS posts or operation log analysis. There are few applications for vital data analysis and proper use of micro batch and stream processing to extract necessary data is not discussed sufficiently. Here, we summarize existing problems. The first is proper use of analyzing methods. To utilize vital data in real-time, not only batch processing but also stream processing for continuous data and micro batch processing for bulk data of short period are needed, but it is not considered to apply health care industry sufficiently. The second is network cost. Because vital data is continuously generated, bandwidth to transfer them to a cloud is large.

3. Proposal of vital data analysis platform which resolves existing problems

In this section, we propose vital data analysis platform which resolves existing problems. In 3.1, we explain approaches to resolve existing problems. In 3.2, we show a design of platform to analyze vital data based on HDP.

3.1 Approaches to resolve existing problems

Our platform collects workers' vital data via wearable sensor such as hitoe, analyzes them and stores on a cloud. Our platform can store workers' health statuses such as fatigue level change, alerts for emergent situation such as dangerous posture.

To resolve existing problems, we propose following two ideas for our platform.

The first is semi real-time analysis of fatigue and relaxation by micro batch processing of vital data using Spark Streaming on a cloud.

The second is stream processing of hitoe data on smart phones to extract primary processed data from raw data and to detect dangerous posture.

Thanks to these ideas, we have following merits.

Smart phones only send primary processed data (e.g., heartbeat interval RRI) from huge continuous data (e.g., ECG) to a cloud. This can reduce network cost. Smart phones also analyze posture in streaming processing and can immediately notify alerts of dangerous postures during working such as pick up things even if a mobile network is disconnected.

A cloud analyzes bulk primary processed data in a short period (e.g., 1 minute RRI data) and extracts high level information such as fatigue or relaxation. Because analyzing fatigue or relaxation needs complex analyzing logic, rich computation resources of cloud are used. And for high accuracy analysis of high level information, analysis of bulk data with certain period is needed. Therefore, we adopt micro batch processing which repeats storing and analyzing in a short period.

3.2 Design of vital data analysis platform

Figure 1 shows system image based on above ideas. Figure 1 also shows processing steps of vital sensor data analysis using HDP where sensor stream data is analyzed by Spark Streaming and analyzed data is stored to HBase. Though HDP provides various modules of Open Source Software such as batch processing and SQL processing, we only use modules for target micro batch processing for high level health information. And HDP can be built on cloud middleware such as OpenStack (e.g., OpenStack cloud services such as [26]-[30] and cloud provisioning such as [31] [32]).

Wearable sensor hitoe sends workers' vital data to smart phones. Hitoe is an example of wearable sensor which NTT and Toray develop and collects ECG and 3-axis acceleration. Smart phones analyze vital data simply to extract primary processed data of RRI from ECG and posture from acceleration and sends them to a cloud via REST style. This analysis can be done by hitoe SDK [33]. Because raw data of ECG is huge, primary processed data such as RRI is sent to a cloud. If smart phones detect dangerous postures such as picking up things during working, smart phones notify to workers.

Vital data is sent to a cloud and collected data is delivered by messaging system Apache Kafka by publish/subscribe method. Spark Streaming Dispatcher subscribes collected data to Kafka. The Dispatcher stores acquired data to HBase and publishes cleansed data to Kafka. Spark Streaming Analysis job subscribes cleansed data to Kafka. The Analysis job analyzes cleansed data sets of with defined window size in a micro batch processing and extracts fatigue and relaxation level. Window sizes of micro batch are configurable for each extracted data type. Fatigue level is calculated using RRI change (e.g., [34]) and relaxation level is calculated with cardiac vagal index (CVI) [35]. Lastly, analyzed data is stored to HBase.


High level data such as fatigue and relaxation is utilized various ways such as to analyze deeply with other sensor data. When we add other sensor data, we can use cloud configuration technologies of [36] and automatic regression test technologies of [37] [38] for configuration change. And if we need computation power for high level data extraction, we can use GPU to compute such as [39]. And for other systems coordination, Web services [40]- [45] or other technologies such as [46]- [50] can be used.

We implemented our platform using Spark and HBase. Figure 2 shows a screen image of implemented platform and hitoe. We are preparing a field test. We will report the result of field test in another paper.

4. Conclusion

In this paper, we proposed a vital data analysis platform which resolves existing problems based on HDP architecture to utilize vital data for real-time actions.

Our platform has two characteristics. The first is semi real-time analysis of fatigue and relaxation by micro batch

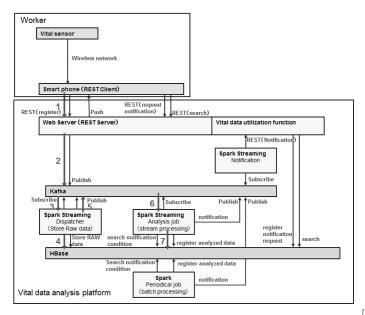

⊠ 1 Data processing steps based on HDP



 $\boxtimes 2$ Screen image of implemented platform

processing of vital data using Spark Streaming on a cloud. The second is stream processing of raw vital data on smart phones. This can reduce network cost to filter huge ECG data and can notify dangerous posture immediately. Our platform can manage workers' health information in realtime with low cost and enables real-time actions.

We will propose our platform to actual industry companies to conduct a field test.

文

献

- Y. Yamato, Y. Fukumoto and H. Kumazaki, "Predictive Maintenance Platform with Sound Stream Analysis in Edges," Journal of Information Processing, Vol.25, 2017.
- [2] Y. Yamato, Y. Fukumoto and H. Kumazaki, "Proposal of Shoplifting Prevention Service Using Image Analysis and ERP Check," IEEJ Transactions on Electrical and Electronic Engineering, Vol.12, 2017.
- [3] M. Hermann, T. Pentek and B. Otto, "Design Principles for Industrie 4.0 Scenarios," Working Draft, Rechnische Universitat Dortmund. 2015, http://www.snom.mb.tudortmund.de/cms/de/forschung/Arbeitsberichte/Design-Principles-for-Industrie-4_0-Scenarios.pdf
- [4] P. C. Evans and M. Annunziata, "Industrial Internet: Pushing the Boundaries of Minds and Machines,"

Technical report of General Electric (GE), Nov. 2012. http://www.ge.com/docs/chapters/Industrial_Internet.pdf

- [6] A. Banks and R. Gupta, "MQTT Version 3.1.1," OASIS Standard, Oct. 2014. http://docs.oasis-open.org/mqtt/mqtt/ v3.1.1/os/mqtt-v3.1.1-os.html.
- [7] M. Takemoto, Y. Yamato and H. Sunaga, "Service Elements and Service Templates for Adaptive Service Composition in a Ubiquitous Computing Environment," The 9th Asia-Pacific Conference on Communications (APCC2003), Vol.1, pp. 335-338, Penang, Sep. 2003.
- [8] Y. Yokohata, Y. Yamato, M. Takemoto and H. Sunaga, "Service Composition Architecture for Programmability and Flexibility in Ubiquitous Communication Networks," IEEE International Symposium on Applications and the Internet Workshops (SAINTW'06), pp.145-148, Phoenix, Jan. 2006.
- [9] 山登庸次,中辻真,須永宏,"ユビキタス環境で動的にサービス実 現するためのサービス合成技術," 情報処理学会論文誌, Vol.48, No.2, pp.562-577, Feb. 2007.
- [10] 山登庸次,須永宏,"ユビキタスサービス合成に用いる抽象 サービスシナリオ生成手法の検討,"電子情報通信学会論文誌, Vol.J91-B, No.10, pp.1220-1230, Oct. 2008.
- [11] Y. Yamato, Y. Nakano and H. Sunaga, "Study and Evaluation of Context-Aware Service Composition and Change-Over Using BPEL Engine and Semantic Web Techniques," IEEE Consumer Communications and Networking Conference (CCNC 2008), pp.863-867, Jan. 2008.
- [12] Y. Yamato, H. Ohnishi and H. Sunaga, "Development of Service Control Server for Web-Telecom Coordination Service," IEEE International Conference on Web Services (ICWS 2008), pp.600-607, Beijing, Sep. 2008.
- [13] H. Sunaga, Y. Yamato, H. Ohnishi, M. Kaneko, M. Iio and M. Hirano, "Service Delivery Platform Architecture for the Next-Generation Network," ICIN2008, Session 9-A, Bordeaux, Oct. 2008.
- [14] S. Arakawa, "Development and Deployment of KOMTRAX Step 2," Komatsu Technical Report Vol.48, No.150, 2002.
- $[15] \quad {\rm Hortonworks\,data\,platform\,website,\,http://hortonworks.com/}$
- [16] S. Tsukada, H. Nakashima and K. Torimitsu, "Conductive Polymer Combined Silk Fiber Bundle for Bioelectrical Signal Recording", PLoS ONE, Vol.7, No.4, pp.e33689, 2012
- [17] Amazon Kinesis website, https://aws.amazon.com/kinesis/
- [18] NTT Docomo press release website, https://www.nttdocomo. co.jp/english/info/media_center/pr/2015/0708_00.html
- [19] Toami web site (Japanese), http://www.m2m-cloud.jp/
- [20] N. Marz. "STORM: Distributed and fault-tolerant realtime computation," 2013. http://storm-project.net.
- [21] M. Zaharia, M. Chowdhury, M. J. Franklin, S. Shenker and I. Stoica, "Spark: Cluster computing with working sets," Proceedings of the 2nd USENIX Conference on Hot Topics in Cloud Computing, 2010.
- [22] J.Dean, and S. Ghemawat, "MapReduce: Simplified data processing on large clusters," In proceedings of the 6th Symposium on Opearting Systems Design and Implementation (OSDI'04), pp.137-150, Dec. 2004.
- [23] K. Shvachko, Hairong Kuang, S. Radia and R. Chansler, "The Hadoop Distributed File System," IEEE 26th Symposium on Mass Storage Systems and Technologies (MSST2010), pp.1-10, May 2010.
- [24] Apple Watch web site, https://www.apple.com/watch/
- [25] Sony SmartEyeglass web site, http://developer.sonymobile.com/products/smarteyeglass/
- [26] Y. Yamato, Y. Nishizawa, S. Nagao and K. Sato, "Fast and Reliable Restoration Method of Virtual Resources on OpenStack," IEEE Transactions on Cloud Computing, DOI:

10.1109/TCC.2015.2481392, 12 pages, Sep. 2015.

- [27] Y. Yamato, "OpenStack Hypervisor, Container and Baremetal Servers Performance Comparison," IEICE Communication Express, Vol.4, No.7, pp.228-232, July 2015.
- [28] Y. Yamato, "Cloud Storage Application Area of HDD-SSD Hybrid Storage, Distributed Storage and HDD Storage," IEEJ Transactions on Electrical and Electronic Engineering, Vol.11, No.5, pp.674-675, Sep. 2016.
- [29] Y. Yamato, N. Shigematsu and N. Miura, "Evaluation of Agile Software Development Method for Carrier Cloud Service Platform Development," IEICE Transactions on Information & Systems, Vol.E97-D, No.11, pp.2959-2962, Nov. 2014.
- [30] Y. Yamato, S. Katsuragi, S. Nagao and N. Miura, "Software Maintenance Evaluation of Agile Software Development Method Based on OpenStack," IEICE Transactions on Information & Systems, Vol.E98-D, No.7, pp.1377-1380, July 2015.
- [31] Y. Yamato, Y. Nishizawa, M. Muroi and K. Tanaka, "Development of Resource Management Server for Production IaaS Services Based on OpenStack," Journal of Information Processing, Vol.23, No.1, pp.58-66, Jan. 2015.
- [32] Y. Yamato, "Performance-Aware Server Architecture Recommendation and Automatic Performance Verification Technology on IaaS Cloud," Service Oriented Computing and Applications, Springer, DOI: 10.1007/s11761-016-0201x, Nov. 2016.
- [33] hitoe transmitter SDK web site, https://dev.smt.docomo.ne .jp/?p=docs.api.page&api_name=iot_control&p_name= api_usage_scenario
- [34] K. Yokoyama and I. Takahashi, "Feasibility Study on Estimating Subjective Fatigue from Heart Rate Time Series," IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences, Vol.96, No.11, pp.756-762, 2013. (in Japanese)
- [35] Stephen. W. Porges, "Cardiac vagal tone: a physiological index of stress," Neuroscience and Biobehavioral Reviews, Vol.19, No.2, pp.225-233, 1995.
- [36] Y. Yamato, M. Muroi, K. Tanaka and M. Uchimura, "Development of Template Management Technology for Easy Deployment of Virtual Resources on OpenStack," Journal of Cloud Computing, Springer, 2014, 3:7, DOI: 10.1186/s13677-014-0007-3, 12 pages, June 2014.
- [37] Y. Yamato, "Automatic verification technology of software patches for user virtual environments on IaaS cloud," Journal of Cloud Computing, Springer, 2015, 4:4, DOI: 10.1186/s13677-015-0028-6, 14 pages, Feb. 2015.
- [38] Y. Yamato, "Automatic system test technology of user virtual machine software patch on IaaS cloud," IEEJ Transactions on Electrical and Electronic Engineering, Vol.10, Issue.S1, pp.165-167, Oct. 2015.
- [39] Y. Yamato, "Optimum Application Deployment Technology for Heterogeneous IaaS Cloud," Journal of Information Processing, Vol.25, No.1, pp.56-58, Jan. 2017.
- [40] Y. Nakano, Y. Yamato, M. Takemoto and H. Sunaga, "Method of creating web services from web applications," IEEE International Conference on Service-Oriented Computing and Applications (SOCA 2007), pp.65-71, Newport Beach, June 2007.
- [41] 山登庸次,大西浩行,須永宏, "Web-テレコム連携のための サービス実行制御技術の研究開発," 電子情報通信学会論文誌, Vol.J91-B, No.11, pp.1417-1427, Nov. 2008.
- [42] 中野雄介,山登庸次,武本充治,須永宏,"Web アプリケーション Web サービス化ラッパシステムの実装と評価," 情報処理学 会論文誌, Vol.49, No.2, pp.727-738, Feb. 2008
- [43] Y. Yamato, Y. Tanaka and H. Sunaga, "Context-aware Ubiquitous Service Composition Technology," The IFIP In-

ternational Conference on Research and Practical Issues of Enterprise Information Systems (CONFENIS 2006), pp.51-61, Vienna, Apr. 2006.

- [44] Y. Yamato, H. Ohnishi and H. Sunaga, "Study of Service Processing Agent for Context-Aware Service Coordination," IEEE International Conference on Service Computing (SCC 2008), pp.275-282, July 2008.
- [45] Y. Yamato and H. Sunaga, "Context-Aware Service Composition and Component Change-over using Semantic Web Techniques," IEEE International Conference on Web Services (ICWS 2007), pp.687-694, Salt Lake City, July 2007.
- [46] M. Takemoto, T. Ohishi, T. Iwata, Y. Yamato, T. Tanaka, S. Tokumoto, N. Shimamoto, A. Kurokawa, H. Sunaga and K. Koyanagi, "Service-composition Method and Its Implementation in Service-provision Architecture for Ubiquitous Computing Environments," IPSJ Journal, Vol.46, No.2, pp.418-433, Feb. 2005. (in Japanese)
- [47] Y. Yamato, Y. Nakano and H. Sunaga, "Context-aware Service Composition and Change-over Using BPEL Engine and Semantic Web," INTECH Open Access Publisher, pp.257-270, 2010
- [48] Y. Yokohata, Y. Yamato, M. Takemoto, E. Tanaka and K. Nishiki, "Context-Aware Content-Provision Service for Shopping Malls Based on Ubiquitous Service-Oriented Network Framework and Authentication and Access Control Agent Framework," IEEE Consumer Communications and Networking Conference (CCNC 2006), pp.1330-1331, Las Vegas, Jan. 2006.
- [49] 山登庸次,横畑夕貴,中野雄介,浜田信,武本充治,須永宏,田 中英里香,西木健哉,寺西裕一,下條真司,"買物支援サービス 実証実験を通したユビキタスサービス合成技術の検証,"情報処 理学会論文誌, Vol.48, No.2, pp.755-769, Feb. 2007.
- [50] H. Sunaga, M. Takemoto, Y. Yamato, Y. Yokohata, Y. Nakano and M. Hamada, "Ubiquitous Life Creation through Service Composition Technologies," World Telecommunications Congress 2006 (WTC2006), Budapest, May 2006.